

## TECHNICAL BULLETIN

**Vehicle Model:**

Chery A5 series

**No:** TB-E0089

**Date:** 2007/02/25

**Section:** ELECTRIC

**Title:**

The Way of Clearing Maintenance-warning Light of A5 Engine

**Affected range:**


All Chery A5 series vehicles, including A520 and A516

**Description:**

For Chery A5 series vehicles equipped with ACTECO1.6 or 2.0 engine, maintenance-warning light of engine will be on automatically to remind the customer of driving the vehicle to the service station for maintenance. When the accumulative kilometers of odometer is in excess of 5,000 km.

After maintenance, the service station should clear maintenance-warning light of A5 engine for customer, the way is as follows:

1. Turn off ignition switch, and then always press Mode-switch Button.
2. Turn on ignition switch, and then release Mode-switch Button.
3. Touch Mode-switch Button and Clock Regulation Button synchronously within 30S (TOUCH TIME <2S)
4. Now, maintenance-warning light of A5 engine can be cleared.

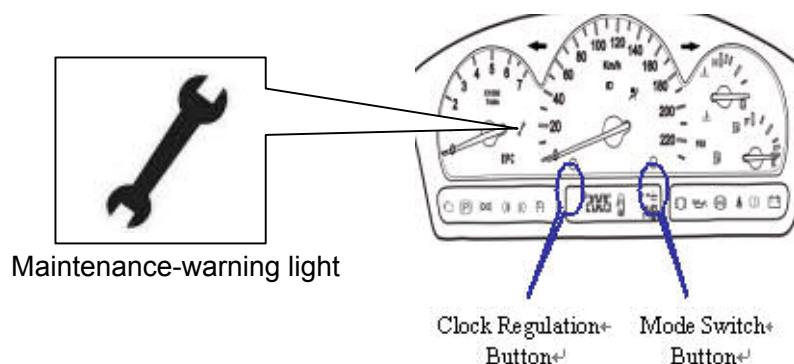

Compiled by:

**Tony Gu**

Checked by:

**Sam Zhang**

Approved by:

**Frank Ouyang**